


3M™ No-Touch™ Earplugs

Technical datasheet

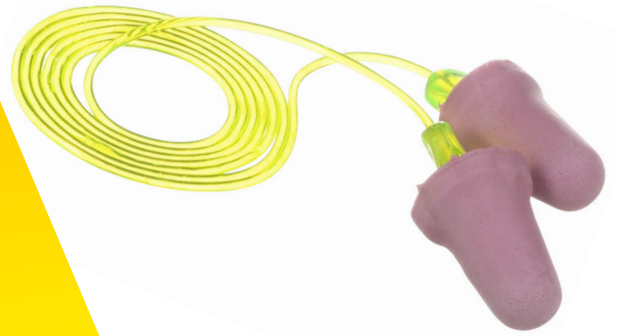

Product description

The 3M™ No-Touch™ Earplugs are designed for insertion into the ear canal to help reduce exposure to harmful levels of noise.

These earplugs may be used for protection against high noise environments, providing effective protection against all test frequencies. Please refer to the attenuation table for further details.

Key features

- ▶ SNR 34 dB
- ▶ Higher 'L' value of HML data, provides better attenuation at low frequencies (< 500Hz)
- ▶ Tapered shape
- ▶ No roll-down required, which helps to keep the earplug clean during fitting
- ▶ These products feature a specially designed paddle grip which can make insertion and removal easier
- ▶ Available in one size which fits majority of wearers
- ▶ Soft foam conforms to the shape of the ear canal for comfort and wearability
- ▶ Corded to allow you to store them around your neck when not in use
- ▶ Available in corded (PN-01-004) version only
- ▶ Compatible with the 3M™ E-A-Rfit™ Dual-Ear Validation System
- ▶ Push-to-fit design helps prevent the eartip becoming contaminated

Standard and approval:

This product is in compliance with appropriate Directives or Regulations to fulfill the requirements for the CE and/or UKCA marking.

The full text of the Declaration of Conformity is available at the following internet address: www.3M.com/hearing/certs.

Important notice

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable national and/or European regulations and standards. Failure to properly evaluate, select, and use a 3M product in accordance with all applicable instructions and with appropriate safety equipment, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: A limitation of liability applies to the 3M product(s). For warranty statement and limitation of liability, refer to your supply agreement or the 3M terms & conditions of sale.

3M industrial and occupational products are intended, labeled, and packaged for sale to trained industrial and occupational customers for workplace use.

Personal Safety Division

3M United Kingdom PLC
3M Centre
Cain Road, Bracknell
Berkshire RG12 8HT
t: 0870 60 800 60
www.3M.co.uk/safety

3M Ireland Limited
The Iveagh Building
The Park
Carrickmines
Dublin 18
Ireland

Version 4

This version is the sole document applicable to the product(s) since its date of publication.

© 3M 2023.

3M, No-Touch and E-A-Rfit are trademarks of 3M Company. All rights reserved.

Materials

Earplugs	Polyurethane foam
Stem	PVC
Cord	PVC

Nominal size range

Smallest fitted: 6 mm

Largest fitted: 14 mm

Attenuation values:

	Frequency (Hz) <i>f</i>								H	M	L	SNR
	63	125	250	500	1000	2000	4000	8000				
Mf (dB)	34.3	29.3	33.3	34.3	34.3	37.0	45.2	48.1	38.1	34.6	33.2	37.3
Sf (dB)	5.5	3.9	4.6	5.5	4.9	3.4	4.6	4.2	3.0	3.7	3.9	3.2
APVf (dB)	28.8	25.4	28.7	28.8	29.4	33.6	40.6	43.9	35	31	29	34

Key:

f = Test frequency

Mf = Mean attenuation value

Sf = Standard deviation

APVf (Mf - Sf) = Assumed Protection Value

H = High-frequency attenuation value

(predicted noise level reduction for noise with LC – LA = -2dB)

M = Medium-frequency attenuation value

(predicted noise level reduction for noise with LC – LA = +2dB)

L = Low-frequency attenuation value

(predicted noise level reduction for noise with LC – LA = +10dB)

SNR = Single Number Rating (the value that is subtracted from the measured C-weighted sound pressure level, LC in order to estimate the effective A-weighted sound pressure level inside the ear)

Information on Shelf life and service life can be found in the User Instructions.